REPUBLIKA E KOSOVËS-REPUBLIKA KOSOVA-REPUBLIC OF KOSOVA
QEVERIA E KOSOVËS-VLADA KOSOVA-GOVERNMENT OF KOSOVA
MINISTRIA E SHËNDETËSISË-MINISTARSTVO ZDRAVLJA-MINISTRY OF HEALTH
Njësia Org. / Org.Jedinica / Org Unit 09
Nr.Prot: / Broj Prot: / Prot.No: 05-7970
Nr.i faqeve / Br.stranica / No.pages -22-
Data: / Datum: / Date: 10 / 11 / 2026
Prishtinë / a

Republika e Kosovës

Republika Kosova - Republic of Kosovo

Qeveria – Vlada - Government

Ministria e Shëndetësisë - Ministarstvo zdravstva - Ministry of Health

Divizioni i Prokurimit/Divizia Nabavke/Procurment Division

KONTRATË PUBLIKE

FURNIZIM

"Furnizim me pajisje te IT-se për Inspektorate"

Numri i kontratës[1]: **206-26-8239-1-3-6/C1165**

Nr. i prokurimit: 206-26-8239-1-3-6

Operatori ekonomik: **RIAL GROUP RKS L.L.C.**

NUI: **812154665**

[1] Ju lutemi referojuni këtij numri të kontratës në dokumentet e faturimit dhe pagesës, procedurat dhe transaksionet që lidhen me thesarin.

KONTRATË

Numri i kontratës [2]: **206-26-8239-1-3-6/C1165**

MINISTRIA E SHËNDETËSISË, (në vazhdim "Autoriteti Kontraktues"), në njërën anë; dhe

RIAL GROUP RKS L.L.C., Rruga Jakove Xoxa , p.n, Prishtine, (ne vazhdim "Furnizuesi"), ne anën tjetër, janë pajtuar te lidhin një kontrate publike për furnizimet e shënuara me poshtë:

"Furnizim me pajisje te IT-se për Inspektorate" me numër identifikues: **206-26-8239-1-3-6**

Neni 1 Lënda

1.1 Lënda e kontratës do të jetë: Furnizim me pajisje te IT-se për Inspektorate.

1.2 Kontrata hynë në fuqi ne ditën e nënshkrimit dhe përfundon pas max. 30 ditësh.

1.3 Afati kohor i performances nuk mund të jetë më shumë se 30 ditë nga data e marrjes së urdhëresës.

1.4 Vendi i dërgimit te furnizimeve do të jetë: ne Zyrat e Inspektoratit, lagja Lakërishtë ne Prishtine.

1.5 Incotermi i aplikueshëm do të jetë DDP[3] (Detyra e Dërguar e Paguar).

NR.	Emri i produktit	Njësia	Sasia	Çmimi për njësi (€)	Çmimi Total
1	Conector Rj45	cope	100	0.04 €	4.00 €
2	UPS1200VA, 650W	cope	1	135.00 €	135.00 €
3	SWITCH PEO 24PORT	cope	2	810.00 €	1,620.00 €
4	PROJEKTOR SET	cope	1	410.00 €	410.00 €
				TOTALI i përgjithshëm (DDP):	**2,169.00 €**

Neni 2 Ligji i aplikueshëm

2.1 Ligji i zbatueshëm do të jetë sipas Nenit 40 të Ligjit Nr. 04/L-042 për Prokurimin Publik të Republikës se Kosovës, i ndryshuar dhe plotësuar me ligjin Nr. 04/L-237, ligjin Nr. 05/L-068 dhe ligjin Nr. 05/L-092 Për çështjet që nuk mbulohen me dispozita të kontratës, zbatohen ligjet në fuqi në Kosovë. Juridiksioni do të jetë gjykata përkatëse në Prishtinë.

Neni 3 Çmimi

3.1 Çmimi total i kontratës do të jetë **2,169.00 €;** [Dymijenjëqindegjashtëdhjetenëntë] Euro.

3.2 Çmimi i përmendur në Nenin 3.1 më sipër duhet të jetë e vetmja pagesë që Autoriteti Kontraktues i ka borxh Operatorit Ekonomik sipas kontratës. Ai duhet të jetë i prerë dhe të mos i nënshtrohet ndryshimeve gjatë ekzekutimit të kontratës (në përjashtim të çmimeve të atyre artikujve që i nënshtrohen ndryshimit të çmimit sipas berzës përkatëse, nëse aplikohet).

Neni 4 Pagesat

4.1 Pagesa do të bëhet në Euro.

Autoriteti Kontraktues do të paguaj shumën totale te pagesës pas pranimit të tërë dërgesës.

4.2 Pagesat e detyrimeve sipas një fature të lëshuar nga Operatori Ekonomik duhet të paguhet brenda jo më shumë se 30 ditësh nga data në të cilën kërkesa e pranueshme për pagesë është regjistruar nga departamenti përkatës. Data e pagesës do të jetë data në të cilën debitohet llogaria e institucionit. Kërkesa për pagesë nuk do të jetë e pranueshme nëse nuk plotësohen një ose më shumë nga kërkesat thelbësore.

---

[2] Ju lutemi referojuni këtij numri të kontratës në dokumentet e faturimit dhe pagesës, procedurat dhe transaksionet që lidhen me thesarin.

[3] DDP – Detyra e Dërguar e Paguar- Incoterms 2010 Oda Ekonomike Ndërkombëtare

Neni 5 Marrëveshjet lidhur me tatimin dhe doganën

5.1 Operatori Ekonomik është përgjegjës për të gjitha detyrimet dhe taksat në përputhje me Ligjin e Republikës së Kosovës.

5.2 Të gjitha taksat dhe detyrat e tjera doganore konsiderohen se janë të përfshira në çmimin e kontratës.

Neni 6 Kualiteti

6.1 Kualiteti i furnizimeve duhet në të gjitha aspektet të plotësoj specifikimet teknike të parashtruara në Dosjen e Tenderit.

Neni 7 Garancioni

7.1 Garancioni do të mbetet valid për 24 muaj, pas pranimit të furnizimeve.

Neni 8 Vonesat në ekzekutim

8.1 Nëse Operatori Ekonomik me përgjegjësinë e tij nuk arrin t'i dorëzojë ndonjë ose të gjitha mallrat brenda limiteve kohore të specifikuara në kontratë, Autoriteti Kontraktues, pa njoftim zyrtar dhe pa paragjykim ndaj kompensimeve tjera të tij sipas kontratës, do të ketë të drejtë, për secilën ditë që kalon ndërmjet skadimit të periudhës së kontratës dhe datës aktuale të përfundimit, t'i marrë dëmet e likuiduara të barabarta me 0,25% në ditë të vlerës së furnizimeve të pa dorëzuara deri në një maksimum prej 10 % të vlerës totale të kontratës.

Neni 9 Inspektimi dhe testimi

9.1 Autoriteti kontraktues do të ketë të drejtë që herë pas here të inspektojë, kontrollojë, masë dhe testojë komponentët, materialet, dhe mjeshtërinë, dhe të kontrollojë përparimin e përgatitjes, fabrikimit apo prodhimit të çfarëdo artikulli që përgatitet, fabrikohet ose prodhohet për t'u dorëzuar sipas kontratës, në mënyrë që të përcaktojë nëse komponentët, materialet dhe mjeshtëria kanë cilësinë dhe sasinë e kërkuar.

Neni 10 Nën-kontraktimi

10.1 Një nënkontratë do të jetë e vlefshme vetëm nëse është një marrëveshje me shkrim me të cilin Operatori Ekonomik i beson kryerjen e një pjese të kontratës së tij një pale të tretë. Operatori Ekonomik nuk duhet të nënkontraktojë pa autorizim paraprak me shkrim nga Autoriteti Kontraktues. Autoriteti Kontraktues do të njoftojë Operatorin Ekonomik për vendimin e tij brenda 5 ditëve nga marrja e njoftimit, duke i paraqitur arsyet e veta nëse nuk lëshohet autorizimi.

Neni 11 Ndërprerja e Kontratës nga Autoriteti kontraktues

11.1 Autoriteti kontraktues mundet që, pasi t'i japë Operatorit Ekonomik shtatë ditë paralajmërim, ta ndërpresë kontratën në ndonjërin nga rastet në vijim: a) Kur operatori ekonomik nuk arrin t'i realizoj obligimet e veta sipas kontratës; b) Dështon në ekzekutimin e kontratës në afatin e caktuar; c). Refuzon urdhrat administrativ të autoritetit kontraktues; d) Ia jep dikujt kontratën apo nënkontratën pa autorizim nga autoriteti kontraktues; e). Falimenton; f). Është dënuar nga një gjykatë për një shkelje që ka të bëjë me sjellje profesionale, përmes një gjykimi që ka fuqinë e *res-judikata*; g) Operatori ekonomik i është nënshtruar një gjykimi që ka forcën e *res judicata* për mashtrim, korrupsion, përfshirje në ndonjë organizatë kriminale ose ndonjë aktivitet tjetër ilegal që i dëmton interesat e përgjithshme financiare; h) shfaqet ndonjë paaftësi tjetër ligjore që i pengon realizimit të kontratës.

Neni 12 Ndërprerja e Kontratës nga Operatori Ekonomik

12.1 Operatori Ekonomik, pasi e ka paralajmëruar Autoritetin Kontraktues 14 ditë paraprakisht, mund ta ndërpresë kontratën nëse Autoriteti kontraktues: a) Nuk arrin t'i paguajë Operatorin Ekonomik shumën që duhet të paguhet brenda periudhës së saktësuar me kontratë; b) vazhdimisht nuk arrin t'i plotësojë obligimet e veta me kontratë; c) si rezultat i forcës madhore, Operatori Ekonomik nuk është në gjendje për të kryer një pjesë materiale të kontratës për më shumë se 180 ditë, për arsye që nuk janë specifikuar në kontratë ose që nuk i atribuohen të Operatorit Ekonomik.

Neni 13 Zgjidhja e mosmarrëveshjeve me procedurë gjyqësore

13.1 Nëse nuk mund të arrihet zgjidhje brenda 30 ditësh nga fillimi i procedurës miqësore për zgjidhje të mosmarrëveshjes, secila palë mund të kërkojë ose vendim nga gjyqi, ose vendim arbitrimi.

13.2 Çdo mosmarrëveshje ndërmjet palëve të cilat mund të lindin gjatë ekzekutimit së kësaj kontrate dhe se nuk është e mundur të zgjidhet ndryshe ndërmjet palëve do të dorëzohet në Gjykatën Komerciale në pajtim me ligjin e Kosovës.

Neni 14 Komunikimi

14.1 Çdo komunikim me shkrim në lidhje me këtë Kontratë ndërmjet Autoritetit Kontraktues dhe Operatorit Ekonomik duhet jap Titullin e kontratës dhe numrin e identifikimit, dhe duhet të dërgohet me postë, faks, e-mail ose me dorë.

E hartuar në gjuhen Shqipe[4] në tri origjinale, dy origjinale për Autoritetin Kontraktues dhe një origjinal për Operatorin Ekonomik.

Për Autoritetin Kontraktues		**Për Furnizuesin**	
Emri:	**Berat Marmullaku**	*Emri:*	Elion Matoshi
Pozita:	Udhëheqës i Div. te Prokurimit	*Pozita:*	IT
Nënshkrimi:		*Nënshkrimi:*	
Data:	09.11.2026	*Data:*	10/11/2026
Vula:		*Vula:*	

SPECIFIKIMET TEKNIKE TË DETYRUESHME

1	**Conector Rj45**	100
2	**UPS1200VA, 650W** 4 Schuko Transfer time 6 ms typical : 10 ms maximum Battery capacity 9.0 Ah	1
3	**SWITCH PEO 24PORT** Portet kryesore 24× Gigabit Ethernet RJ-45 PoE PoE / PoE+ PoE Budget 100W total Uplink 4× Gigabit SFP Menaxhimi Web GUI, Cisco Business Dashboard, Cisco Business Mobile App Funksione rrjeti VLAN, QoS, ACL, STP/RSTP, IPv4/IPv6 static routing Montimi Rack-mountable, 1U	2
4	**PROJEKTOR SET** Projection System 3LCD Technology 3.000 Lumen Colour Reproduction 16.77 million colours Throw Ratio 1,27 - 1,71:1 Interfaces HDMI 1.4, USB 2.0-A, USB 2.0 Built-in speaker, Perder per Projektor elektirke me mottor 210x210 cm	1

[4] Gjuha do të jetë gjuha e përdorur nga tenderuesi në tenderin e tij.

Prokurimi: 206-26-8239-1-3-6

Nr i brendshëm:

Tituli: "Furnizim me pajisje te IT-se për Inspektorate"

1 "Furnizim me pajisje te IT-se për Inspektorate"

Kodi i tenderit: 206-26-8239-1-3-6

Data: 06.10.2026

Lista e dokumenteve të tenderit mbështetëse

Nr.	Dokument
1.	certifikata e biznesit.pdf
2.	Certifikata e TVSH.pdf
3.	Aneksi 2.pdf
4.	Deklarata per Specifika.pdf
5.	Katalogu.rar

Përshkrimi i çmimeve

Nr	Emërtimi i grupit	Dokumenti
1.	"Furnizim me pajisje te IT-se për Inspektorate"	Pjesa II. Pershkrimi i Çmimeve (1).xlsx

Pjesët e tenderit që do të dorëzohen ndaras:

AUTORITETI KONTRAKTUES

MINISTRIA E SHËNDETËSISË, ZAGREBIT , P.N., -, PRISHTINË,

Zyrtari përgjegjes i prokurimit:

Nr i Prokurimit: 206-26-8239-1-3-6

OPERATOR EKONOMIK:

Emri i kompanisë dhe adresa e plote: **RIAL GROUP RKS L.L.C., Rruga Jakove Xoxa , p.n, 10000, Prishtine, Kosovë**

E-mail: **rinor.d93@gmail.com**

Personi kontaktues: **Albina Rafuna**

Telefoni: **+38349299488**

Faxi:

Numri fiskal: **812154665**

Grup i operatorëve ekonomik (nëse aplikohet):

FORMULAR PËR DORËZIMIN E TENDERIT

Pjesa I. Formulari i Tenderit

Numër të Prokurimit: 206-26-8239-1-3-6

Titulli i kontratës: "Furnizim me pajisje te IT-se për Inspektorate"

Si përgjigje ndaj letrës suaj të ftesës për të tenderuar për kontratën e mësipërme, ne, të poshtë nënshkruarit, deklarojmë që:

1. i kemi kontrolluar dhe pranuar plotësisht përmbajtjet e dosjes së tenderit. Ne pranojmë dispozitat e saj në tërësi, pa rezervim ose kufizim.

2. Ne ofrojmë të dorëzojmë, në pajtim me kushtet e dosjes së tenderit dhe afatet kohore të paraqitura, pa rezervë apo kufizim:

1 "Furnizim me pajisje te IT-se për Inspektorate"

3. Çmimi total i tenderit është:

2,169.00 EUR

Dhe në fjalë [*shëno çmimin e tenderit në fjalë* ***Euro****]*

4. Ky tender është valid për një periudhë prej ose muaj: ose dite: **30** nga data finale për dorëzim të tenderëve.

5. Nëse tenderi jonë pranohet, ne marrim përsipër të sigurojmë një siguri të ekzekutimit para nënshkrimit të kontratës

6. Ne e bëjmë këtë kërkesë, për këtë tender [*shëno numrin e Pjesës, nëse aplikohet*] si partner në konsorcium të udhëhequr nga [*shëno emrin e udhëheqësit*]. Ne konfirmojmë që nuk jemi duke tenderuar për të njëjtën kontratë me ndonjë formular tjetër. Konfirmojmë, si partner në konsorcium, se të gjithë partnerët, bashkërisht dhe veç e veç, janë të detyruar me ligj për realizim të kontratës; se partneri kryesor është i autorizuar të obligojë dhe të marrë udhëzime për secilin anëtar dhe në emër të secilit anëtar që realizimi i kontratës, duke përfshirë edhe pagesat, është përgjegjësia e partnerit kryesor, dhe se të gjithë partnerët në ndërmarrjen e përbashkët/konsorcium janë të obliguar të mbeten në ndërmarrjen e përbashkët/konsorcium gjatë tërë periudhës së realizimit të kontratës.

7. Ne do ta informojmë Autoritetin kontraktues menjëherë nëse ka ndonjë ndryshim në rrethanat e mësipërme në cilëndo fazë gjatë implementimit të kontratës. Gjithashtu ne e dimë dhe pranojmë që të gjitha informatat e pasakta ose jo të plota të cilat jepen me qëllim në këtë konkurrim, mund të kenë si rezultat përjashtimin tonë nga kjo dhe nga kontratat tjera të financuara nga BKK

8. Theksojmë që Autoriteti kontraktues nuk është i obliguar të vazhdojë me këtë ftesë dhe që e rezervon të drejtën për të dhënë vetëm një pjesë të kontratës. Ai nuk do të shkaktojë detyrime ndaj

DEKLARATË PËR SPECIFIKIMET TEKNIKE

Për: Autoriteti Kontraktor – MINISTRIA E SHËNDETËSISË

Aktiviteti i Prokurimit: Furnizim me pajisje te IT-se për Inspektorate

Numri i Prokurimit: 206-26-8239-1-3-6

Operatori Ekonomik: *RIAL GROUP RKS LLC*

NUI (Numri Unik Identifikues): *812154665*

Ne, si Operator Ekonomik **RIAL GROUP RKS LLC**, nëpërmjet kësaj deklarate konfirmojmë se mallrat e ofruara për secilin artikull në kuadër të këtij aktiviteti prokurimi përputhen **100%** dhe plotësojnë në të gjitha detajet specifikimet teknike të kërkuara në dosjen e tenderit.

Më poshtë paraqitet tabela e produkteve dhe modeleve origjinale të prodhuesve që po ofrojmë:

Bashkëngjitur:

Për çdo artikull të mësipërm, po dorëzojmë gjithashtu **Katalogët / Broshurat zyrtare origjinale të prodhuesit (Datasheets)**, ku janë theksuar dhe nënvizuar qartë specifikimet teknike përkatëse.

Data: 06.10.2026

Vula dhe Nënshkrimi:

RIAL GROUP RKS L.L.C.

Product datasheet

Specifications



APC Back-UPS 1200VA, 230V, AVR, Schuko Sockets

BX1200MI-GR

Main

Main input voltage	230 V AC 1 phase
Input connection	CEE 7/7
Cos phi	0.54
Efficiency at full load	140...300 V
Input frequency	50/60 Hz +/- 5 Hz auto-sensing
Output voltage	230 V AC 1 phase
Rated power in W	650 W
Rated power in VA	1200 VA
Output connection	4 CEE 7/3
Type of USB power supply	None
Maximum configurable power in VA	1200 VA
Maximum configurable power in W	650 W
Transfer time	6 ms typical : 10 ms maximum
UPS topology	Line interactive
Waveform type	Stepped approximation to a sinewave
Full load runtime	00:01:00 650 W
Half load runtime	00:05:00 300 W
Output frequency	50/60 Hz +/- 1 Hz sync to mains

Graphs

Run Time	View Runtime Graph
Efficiency	View Efficiency Graph

Complementary

Battery capacity	9.0 Ah
Battery type	Lead-acid internal included
Control panel	LED Status display with on line : on battery
UPS connectivity	None
Surge energy rating	273 J
Cable length	1.2 m
Number of cables	1

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Color	Black
Height	190 mm
Width	140 mm
Depth	390 mm
Product weight	7.6 kg
Mounting preference	No preference
Mounting mode	Not rack-mountable
Two post mountable	0
USB compatible	Yes
Mounting mode	Tower
Number of power module filled slots	0
Number of power module free slots	0
Redundant	No
Range of product	Back-UPS
Product or component type	Uninterruptible power supply (UPS)

Environment

Product certification	CE CB EAC
Standard	EN/IEC 62040-1:2019/A11:2021 EN/IEC 62040-2:2006/AC:2006 EN/IEC 62040-2:2018
Ambient air temperature for operation	0…40 °C
Ambient air temperature for storage	-15…40 °C
Storage altitude	0…3000 m
IP protection	IP20
Relative humidity	0…95 % non-condensing
Storage relative humidity	0…95 % non-condensing
Acoustic level	40 dBA
Operating altitude	0...3000 m

Batteries & Runtime

Battery type	Lead-acid battery
Battery voltage	12 V
Battery graph comment	Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.
Extendable runtime	0
Included battery module	0
Empty battery slot	0
Typical recharge time	8 h
Battery life	3…5 year(s)

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	29.7 cm
Package 1 Width	49.5 cm
Package 1 Length	23.5 cm
Package 1 Weight	8.6 kg
SCC14	10731304410864
Pallet unit layers	10
Pallet layers	6

Contractual warranty

Warranty (in months)	24

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	306 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	82 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.9 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	222 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.8 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
SCIP Number	Ec96232c-7000-4722-846e-a372cdfca8dc
EU RoHS Directive	Compliant By Exemption
REACh Regulation	Reference contains Substances of Very High Concern above the threshold

Use Again

Repack and remanufacture


Recyclability potential, in %	62
End of life manual availability	End of Life Information
Removable battery	No
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


Product datasheet

BX1200MI-GR

Image of product / Alternate images

Alternative

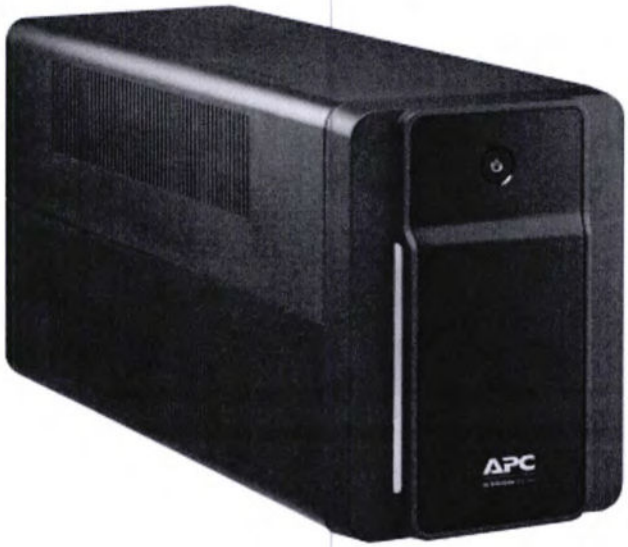

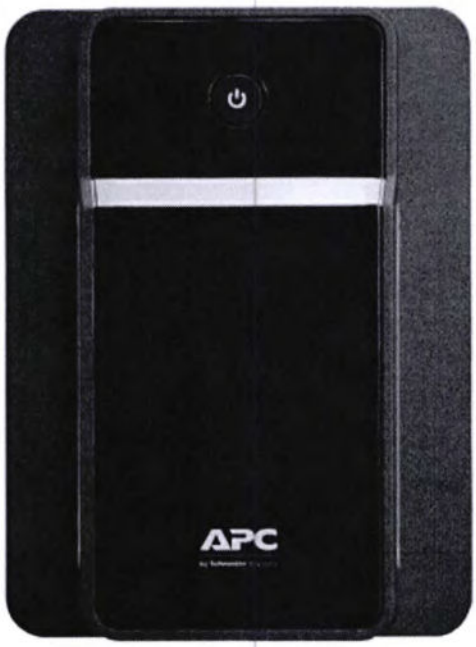

Cisco Business 250 Series Smart Switches Quick Start Guides

Cisco Business 250 Series Switches have different Quick Start Guides, depending on your product. Find your product SKU below to know which v the Quick Start Guide to use.

Quick Start Guide (Pages 2-3)


CBS250-8T-E-2G	CBS250-24T-4G	CBS250-48P-4G
CBS250-8PP-E-2G	CBS250-24PP-4G	CBS250-24T-4X
CBS250-8P-E-2G	CBS250-24P-4G	CBS250-24P-4X
CBS250-8FP-E-2G	CBS250-24FP-4G	CBS250-24FP-4X
CBS250-16T-2G	CBS250-48T-4G	CBS250-48T-4X
CBS250-16P-2G	CBS250-48PP-4G	CBS250-48P-4X

Quick Start Guide (Pages 4-5)

CBS250-8T-D	CBS250-8PP-D

QUICK START GUIDE

Cisco Business 250 Series Smart Switches

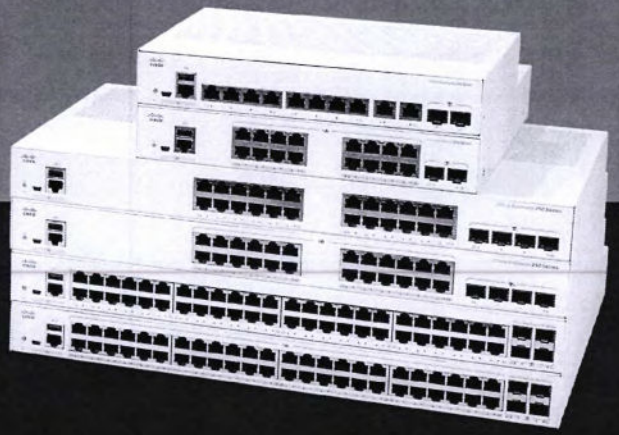


Thank you for choosing the Cisco 250 Series Switch.
These switches are designed to be operational right out of the box as standard s
In the default configuration, the switch forwards packets between the connected
powering up.

Product Features

1. System LED
2. Reset Button
3. Mini USB Console Port
4. USB Port
5. RJ45 Console Port
6. LINK/ACT LEDs
7. Gigabit Network Ports
8. SFP/SFP+ Uplink Ports

What's in the Box

- Cisco Business 250 Series Smart Switch
- Power Cord or Adapter
- Rack-Mount/Wall-Mount Kit
- Quick Start Guide
- Pointer Card with China RoHS
- Technical Support Contacts

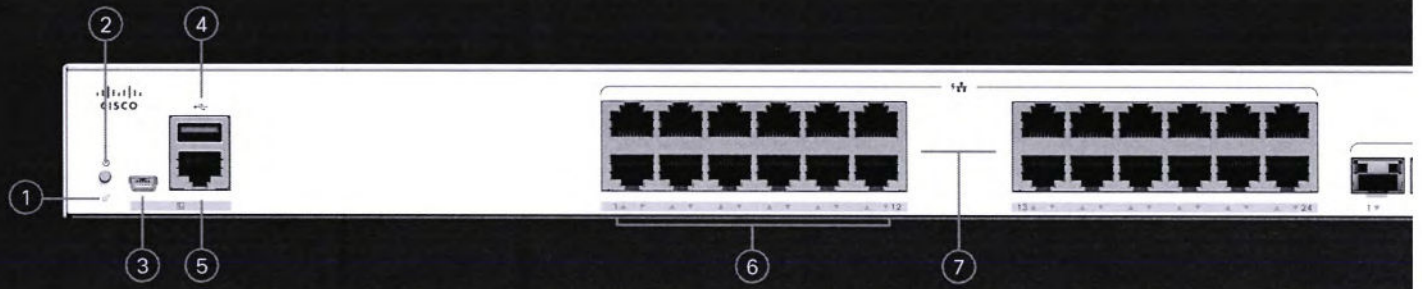


START HERE

First, You'll Need...

- RJ-45 Ethernet cables (Category 5e or higher) for connecting network devices
- Tools for mounting the hardware
- Computer with an Ethernet port (or adapter) and a web browser (Firefox, Chrome, Safari, or Edge)
- A mobile device with Wi-Fi capability (to set up using the mobile app)

Get Connected

Plug the power cord of the switch into an outlet.

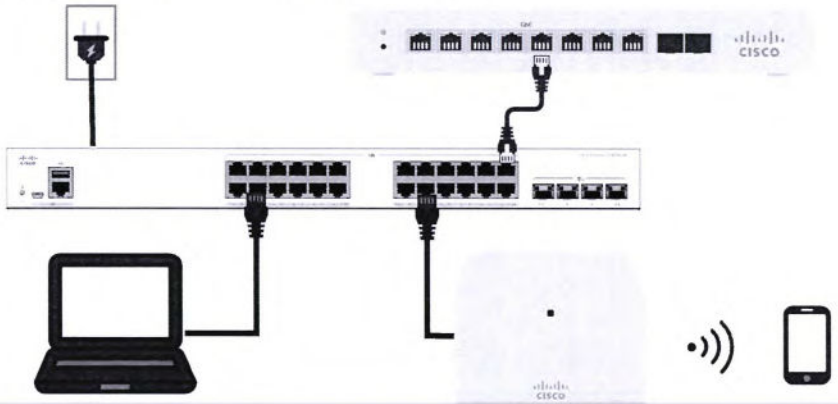

Preparing Your Switch

Using the Mobile app: Connect the switch to an existing wireless network. This could be a wireless access point (shown above), wireless router, or mesh extender. You will need something to act as your DHCP server (a router or switch as shown above). Once connected, proceed to the "Get Configured" section to download the app.

Using the Web User Interface (UI): Connect a computer to one of the switch ports with an Ethernet cable. Make sure your computer is on and proceed to the Web UI Setup instructions under the "Get Configured" section.

LED Functions

LED	GREEN STEADY	GREEN FLASHING	AMBER	OFF
System	Switch has acquired an IP address through DHCP or a static IP address has been manually configured.	Booting, performing self-tests, acquiring IP address, or factory default IP address is being used.	Flashing, hardware failure detected.	Switch is powered off.
LINK/ACT	Link between corresponding port and another device detected.	Port is passing traffic.		Link down.

Get Configured

Download the Cisco Business Mobile app

Scan the QR code here to download the app or go to cisco.com follow the installation instructions.

Alternative: Web UI Setup

1. The switch will attempt to acquire an IP address if there is a DHCP server in the netv acquire an IP address through DHCP, it uses the factory default IP address of 192.16 of /24.
   - If the switch is using the factory default IP address of 192.168.1.254/24, you must computer in the range of 192.168.1.2-192.168.1.253 that is not already in use.
2. Open a web browser window.
3. Enter the switch IP address in the address bar and press **Enter**. For example, **http:/**
   The **Switch Login Page** displays.
4. Enter the default login information:
   - Username is **cisco**
   - Default password is **cisco**
     (passwords are case-sensitive)
5. Click **Log In**.

You are now ready to configure the switch. Refer to the Administration Guide for further

Mounting

For detailed mounting instructions, please see the **"Get Support"** section.

Get Support

For Cisco support and additional documentation, including mounting i Administration Guide, visit https://cisco.com/go/cbs250.

©2021 Cisco and/or its affiliates. All rights reserved. Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its a
To view a list of Cisco trademarks, go to this URL: https:// www.cisco.com/go/trademarks. Third-party trademarks mentioned are the prope
The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

QUICK START GUIDE

Cisco Business 250 Series Smart Switches




Thank you for choosing the Cisco Business 250 Series Switch.
These switches are designed to be operational right out of the box as standard
In the default configuration, the switch forwards packets between the connecte
powering up.

What's in the Box

- Cisco Business 250 Series Switch
- Power Cord or Adapter
- Wall-Mount Kit
- Quick Start Guide
- Pointer Card with China RoHS
- Technical Support Contacts

Product Features

1. Reset Button
2. System LED
3. Link/ACT LEDs
4. PoE (Power over Ethernet) LEDs*

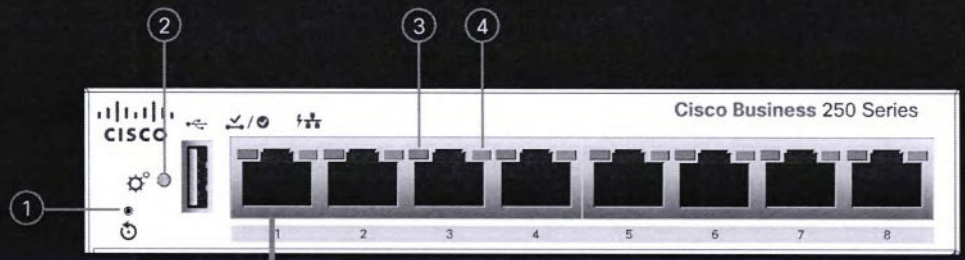

NOTE: On the CBS250-8T-D model, port 1 can work as a PoE PD or PoE input port to power the switch.

START HERE


First, You'll Need...

- RJ-45 Ethernet cables (Category 5e or higher) for connecting network devices
- Tools for mounting the hardware
- Computer with an Ethernet port (or adapter) and a web browser (Firefox, Chrome, Safari, or Edge)
- A mobile device with Wi-Fi capability (to set up using the mobile app)

* PoE product shown. For non-PoE products there is a Gigabit LED

Get Connected

Plug the power cord of the switch into an outlet.

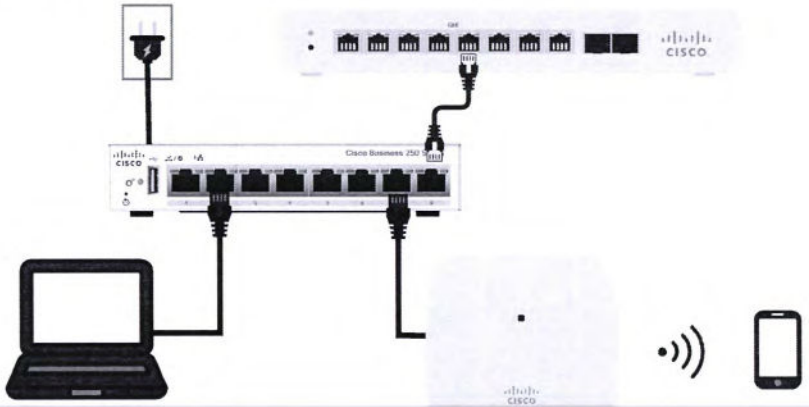

Preparing Your Switch

Using the Mobile app: Connect the switch to an existing wireless network. This could be a wireless access point (shown above), wireless router, or mesh extender. You will need something to act as your DHCP server (a router or switch as shown above). Once connected, proceed to the "Get Configured" section to download the app.

Using the Web User Interface (UI): Connect a computer via Ethernet cable to one of the switch ports. Make sure your computer is on and proceed to Web UI Setup instructions under the "Get Configured" section.

LED Functions

LED	GREEN STEADY	GREEN FLASHING	AMBER	OFF
System	Switch has acquired an IP address through DHCP or a static IP address has been manually configured.	Booting, performing self-tests, acquiring IP address, or factory default IP address is being used.	Flashing, hardware failure detected.	Switch is powered off.
LINK/ACT	Link between corresponding port and another device detected.	Port is passing traffic.		Link down.
PoE*			Steady Power is being supplied to a device connected to the port.	Power is not being supplied or nothing is connected to the port.
Gigabit*	1000Mbps link is established.			Connection speed is under 1000Mbps or nothing is connected to the port.

* Depending on model. PoE switches will only have a PoE LED whereas non-PoE switches will have a Gigabit LED.

Get Configured

Download the Cisco Business Mobile app

Scan the QR code here to download the app or go to cisco.com follow the installation instructions.

Alternative: Web UI Setup

1. The switch will attempt to acquire an IP address if there is a DHCP server in the net acquire an IP address through DHCP, it uses the factory default IP address of 192.1(of /24.
   - If the switch is using the factory default IP address of 192.168.1.254/24, you must computer in the range of 192.168.1.2-192.168.1.253 that is not already in use.
2. Open a web browser window.
3. Enter the switch IP address in the address bar and press **Enter**. For example, **http:/**
   The **Switch Login Page** displays.
4. Enter the default login information:
   - Username is **cisco**
   - Default password is **cisco**
     (passwords are case-sensitive)
5. Click **Log In**.

You are now ready to configure the switch. Refer to the Administration Guide for further

Mounting

For detailed mounting instructions, please see the **"Get Support"** section.

Get Support

For Cisco support and additional documentation, including mounting i Administration Guide, visit https://cisco.com/go/cbs250.

©2021 Cisco and/or its affiliates. All rights reserved. Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its a
To view a list of Cisco trademarks, go to this URL: https:// www.cisco.com/go/trademarks. Third-party trademarks mentioned are the prope
The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

CO-W01

DATASHEET / BROCHURE





Create the big screen experience with this high-quality, long-lasting and flexible projector for the home and office, with WXGA resolution.

Here's a projector the whole family can enjoy; from watching box sets to delivering sharp presentations, this WXGA projector has the tools for the job. There's no need to worry about ambient light; it produces a bright and clear display with 3,000 lumens and 3LCD technology. It's also easy to transport and set up. And its incredibly long lamp life means it's great value for money.

Bigger is better

Whether you're watching your favourite film or delivering a presentation, this projector can achieve an impressive 378 inch display. It's great quality too, with 3LCD technology that makes the display up to three times brighter than competitor products[1], thanks to its bright and vivid colours. From family and friends to business colleagues and clients, it's sure to get everyone's attention.

High-quality, bright images

Even in bright rooms, this powerful yet affordable WXGA projector delivers exceptionally bright yet colourful images with clear details. It's all thanks to 3LCD technology, which produces an equally high White and Colour Light Output of 3,000 lumens.

Long-lasting solution

Looking for a long-term, hassle-free and affordable solution for your projection needs? This model's long-lasting lamp light source provideds you with 18 years' worth of entertainment[2].

Plug and play

Here's a projector that's designed with portability and quick set up in mind. Its compact design makes it easy to move from room to room, and you can quickly position the image with keystone correction and access content simply with the HDMI input.

KEY FEATURES

- **Create the big screen experience**
  From box sets to business presentations, capture everyone's attention
- **Bright even with ambient light**
  Equally high White and Colour Light Output of 3,000 lumens
- **Affordable, high-tech equipment**
  Enjoy this WXGA projector
- **Long-lasting solution**
  18 years' worth of entertainment[2]
- **Portable and quick to set up**
  Easy set up with keystone slider for perfect alignment

No.1 SINCE 2001
EPSON
WORLD LEADER IN PROJECTORS
Source: Futuresource Consulting Ltd.

EPSON
EXCEED YOUR VISION

PRODUCT SPECIFICATIONS

CO-W01

TECHNOLOGY	
Projection System	3LCD Technology, RGB liquid crystal shutter
LCD Panel	0.59 inch with MLA (D10)
IMAGE	
Color Light Output	3,000 Lumen- 2,000 Lumen (economy) In accordance with ISO 21118:2020
White Light Output	3,000 Lumen - 2,000 Lumen (economy) In accordance with ISO 21118:2020
Resolution	WXGA
Lamp	UHE, 188 W, 6,000 h durability, 12,000 h durability (economy mode)
Keystone Correction	Manual vertical: ± 30 °, Manual horizontal ± 30 °
Colour Reproduction	16.77 million colours
OPTICAL	
Throw Ratio	1.27 - 1.71:1
Zoom	Digital, Factor: 1 - 1.35
Screen Size	25 inches - 378 inches
Projection Distance Wide	0.9 m - 10.4 m
Projection Distance Tele	0.9 m - 10.4 m
Projection Distance Wide/Tele	1.64 m (60 inch screen
Projection Lens F Number	1.44
Projection Lens Focus	Manual
Offset	7 : 1
CONNECTIVITY	
Interfaces	HDMI 1.4, USB 2.0-A, USB 2.0 Type B (Service Only)
ADVANCED FEATURES	
Security	Kensington lock, Padlock, Security cable hole
Other features	A/V mute, Built-in speaker, Horizontal and vertical keystone correction, MHL audio/video interface, Quick Corner
Video Color Modes	Blackboard, Cinema, Dynamic, Presentation
GENERAL	
Power consumption	270 Watt, 214 Watt (economy), 0.5 Watt (standby)
Product dimensions	295 x 211 x 87 mm (Width x Depth x Height)
OTHER	
Warranty	Onsite Warranty - 2 years on main unit, 1 year or 1000 hours on lamp whichever is earlier.

WHAT'S IN THE BOX

- Main unit
- Power cable
- Quick Start Guide
- Remote control incl. batteries
- User manual (CD)
- Warranty card

OPTIONAL ACCESSORIES

- Adapter - ELPAP11 Wireless LAN (5GHz) V12H005A01

LOGISTICS INFORMATION

SKU	V11HA86056
EAN code	8715946706849
Country of Origin	Philippines

* Warranty offers are not available for all countries. Please contact your local Epson representative.

1. Colour brightness(colour light output) in brightest mode, measured by a third-party lab in accordance with IDMS 15.4. Colour brightness will vary depending on usage conditions. Top-selling Epson 3LCD projectors versus top selling 1-chip DLP projectors based on NPD sales data for October 2019 through September 2020.
2. Based on watching an average 1hr 45mins film every day and the lamp set in Eco mode.

EPSON INDIA PVT. LTD.
12th Floor, The Millenia, Tower A, No.1,
Murphy Road, Ulsoor, Bangalore – 560 008.
Tel: 080 4566 5000 Fax: 080 4566 5005

Regional Offices:
Ahmedabad 4037 0075, Chennai 3967 7500, Ernakulam 4012 315, Coimbatore 98942 19200, Hyderabad 4857 0032, Jaipur 4923 119, Kolkata 4603 4714/15/29/30, Mumbai 3079 8200, New Delhi 4107 3101, 4752 2414, Pune 3028 6000

Epson Helpline: For product info or service – 1800 425 0011
For service – 1800 123 001 600 or 1860 3000 1600 (9 am – 6 pm) (Mon – Sat)
Email: projector@eid.epson.co.in **www.epson.co.in**

EPSON
EXCEED YOUR VISION

Trademarks and registered trademarks are the property of Seiko Epson Corporation or their respective owners.
Product information is subject to change without prior notice.

celexon™

ELECTRIC ECONOMY


Smart ideas for the bigger picture.

celexon - your specialist
for home cinema and AV solutions

1:1 | IR
4:3 | M
16:9 | BR
FP | BD
BB

PRODUCT DESCRIPTION

The Electric Economy series from celexon is the cost efficient solution for a motorised screen and provides excellent value for money. The surrounding black border improves contrast and clarity of the picture. It also comes with a black opaque backing. The high quality motor is quiet and the screen can be adjusted to any position.

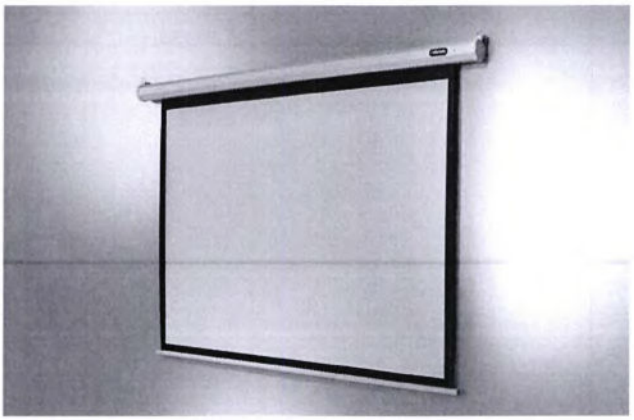

KEY FEATURES

- Excellent value for money
- Elegant white housing
- Ideal for home cinema and business presentations with a gain factor of 1.2
- Wide viewing angle of 100°
- Black opaque backing
- Adjustable to any position
- Quiet motor
- Wall-mounted control box and IR remote included
- Suitable for wall and ceiling installation


OPTIONAL ACCESSORIES



Wall spacers



Radio remote set

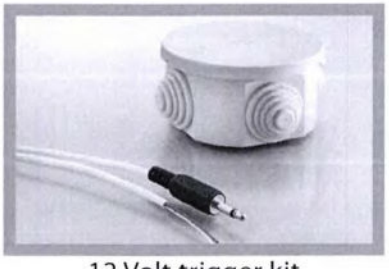

12 Volt trigger kit

celexon™

ELECTRIC ECONOMY

TECHNICAL DATA

Format	Product description	Viewing area W x H	Black drop	Black border ↓ / ← / →	Housing dimensions W x H x D	Weight	EAN
1 : 1	120 x 120 cm	114 x 114 cm	5 cm	3 cm / 3 cm / 3 cm	144 x 10 x 8 cm	11 kg	4260094730788
	160 x 160 cm	154 x 154 cm	5 cm	3 cm / 3 cm / 3 cm	184 x 10 x 8 cm	12 kg	4260094730795
	180 x 180 cm	174 x 174 cm	5 cm	3 cm / 3 cm / 3 cm	204 x 10 x 8 cm	13 kg	4260094730801
	200 x 200 cm	194 x 194 cm	5 cm	3 cm / 3 cm / 3 cm	224 x 10 x 8 cm	14 kg	4260094730405
	220 x 220 cm	214 x 214 cm	5 cm	3 cm / 3 cm / 3 cm	244 x 10 x 8 cm	17 kg	4260094730818
	240 x 240 cm	234 x 234 cm	5 cm	3 cm / 3 cm / 3 cm	263 x 13 x 10 cm	19 kg	4260094730412
	280 x 280 cm	270 x 270 cm	5 cm	5 cm / 5 cm / 5 cm	303 x 13 x 10 cm	21 kg	4260094730429
	300 x 300 cm	290 x 290 cm	5 cm	5 cm / 5 cm / 5 cm	323 x 13 x 10 cm	23 kg	4260094730436
4 : 3	160 x 120 cm	154 x 116 cm	5 cm	3,5 cm / 3 cm / 3 cm	184 x 10 x 8 cm	12 kg	4260094730825
	180 x 135 cm	174 x 131 cm	5 cm	3,5 cm / 3 cm / 3 cm	204 x 10 x 8 cm	13 kg	4260094730269
	200 x 150 cm	194 x 146 cm	5 cm	3,5 cm / 3 cm / 3 cm	224 x 10 x 8 cm	15 kg	4260094730276
	220 x 165 cm	214 x 161 cm	5 cm	3,5 cm / 3 cm / 3 cm	244 x 10 x 8 cm	17 kg	4260094730832
	240 x 180 cm	230 x 173 cm	5 cm	5 cm / 5 cm / 5 cm	263 x 13 x 10 cm	19 kg	4260094730283
	280 x 210 cm	270 x 203 cm	5 cm	5 cm / 5 cm / 5 cm	303 x 13 x 10 cm	21 kg	4260094730290
	300 x 225 cm	290 x 218 cm	5 cm	5 cm / 5 cm / 5 cm	323 x 13 x 10 cm	23 kg	4260094730306
16 : 9	160 x 90 cm	154 x 87 cm	25 cm	3 cm / 3 cm / 3 cm	184 x 10 x 8 cm	12 kg	4260094730849
	180 x 102 cm	174 x 98 cm	25 cm	3 cm / 3 cm / 3 cm	204 x 10 x 8 cm	13 kg	4260094730313
	200 x 113 cm	194 x 109 cm	25 cm	3 cm / 3 cm / 3 cm	224 x 10 x 8 cm	15 kg	4260094730320
	220 x 124 cm	214 x 120 cm	25 cm	3 cm / 3 cm / 3 cm	244 x 10 x 8 cm	17 kg	4260094730856
	240 x 135 cm	230 x 129 cm	25 cm	5 cm / 5 cm / 5 cm	263 x 13 x 10 cm	19 kg	4260094730337
	280 x 158 cm	270 x 152 cm	25 cm	5 cm / 5 cm / 5 cm	302 x 13 x 10 cm	21 kg	4260094730863
	300 x 169 cm	290 x 163 cm	25 cm	5 cm / 5 cm / 5 cm	323 x 13 x 10 cm	23 kg	4260094730870

The dimensions provided are the mean values of the production units. Very slight deviations may be possible. Due to continuous technical improvements, we reserve the right to change design and specifications without prior notice.

Received from your celexon reseller:

Key

1 : 1 Format 1:1 · 2.35 : 1 Format 2,35:1 · 4 : 3 Format 4:3 · 16 : 9 Format 16:9 · 16 : 10 Format 16:10 · BB Black border - surround · BB Black border - bottom/sides · BB Black border - top/sides · BB Black border - sides · BD Black drop · BR Black rear · CR Ceiling recessed possible · FP Front projection · RP Rear projection · Manual · Mobile · M Motorised · RF RF remote control